

# Generator Control Panels


## Panelsource ENGINE & GENERATOR CONTROLS

### P1, P2 AND P3 SERIES



#### SERIES P2

7"(w) X 7"(h) X 7"(d)  
(2.70" style panelboard meters)

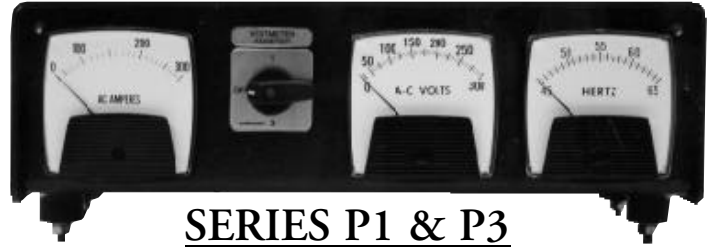

#### SERIES P1 & P3

P1: 11"(w) X 3.625"(h) X 8"(d)  
(2.70" style panelboard meters)  
P3: 15"(w) X 4.5"(h) X 7.5"(d)  
(3.50" style panelboard meters)

#### STANDARD FEATURES

- ABS corrosion proof cabinet
- 2% accuracy ammeter, voltmeter and frequency meters with required fusing
- Current transformers
- Volts/Amps phase selector switch
- Vibration isolators
- Corrosion resistant hardware
- Wiring diagrams

#### OPTIONAL FEATURES

- 3 Phase wiring and fusing up to 480 volts
- Voltage adjust rheostat
- Dual scale voltmeter

#### HOW TO ORDER:

1. Specify P1, P2 or P3 Series.
2. Specify voltage, current, frequency and number of phases.
3. Review option list to customize your panel.

National Marketing and Distribution by Davidson Sales Co.

P.O. Box 9086, Daytona Beach, Fl 32120

Phone: (386) 274-2079 Fax: (386) 274-2279 [www.davidsonsales.com](http://www.davidsonsales.com)